
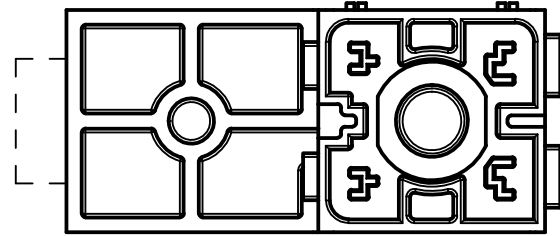




A

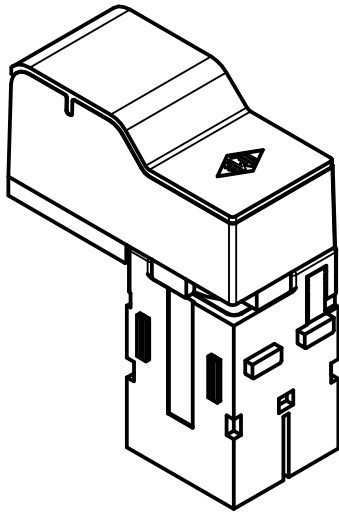

A

Diritti riservati All rights reserved

B

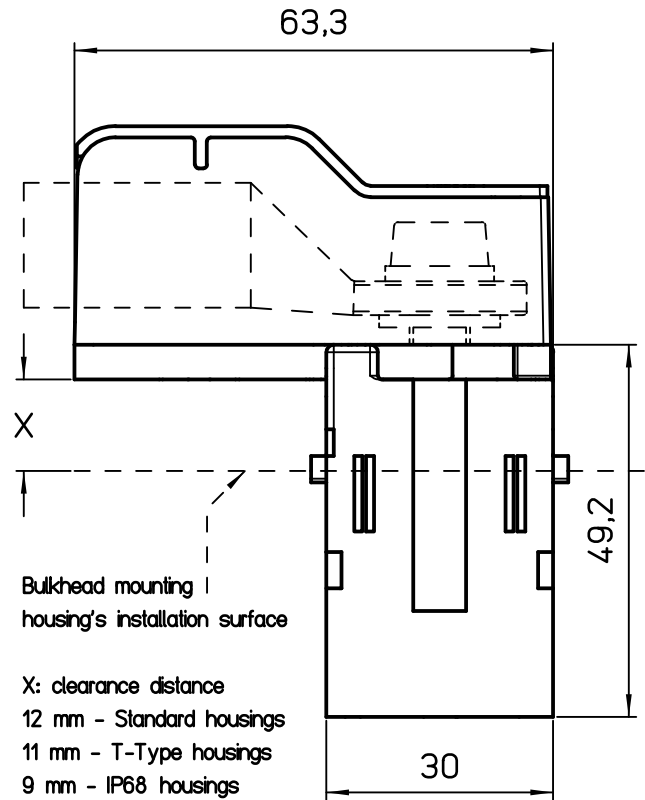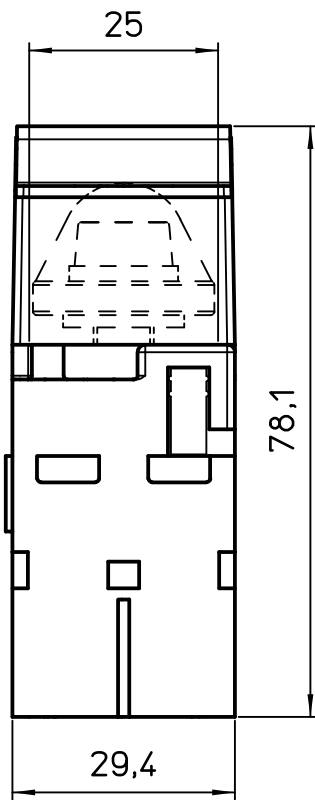


B

Bulkhead mounting housing's installation surface

X: clearance distance  
 12 mm - Standard housings  
 11 mm - T-Type housings  
 9 mm - IP68 housings

C

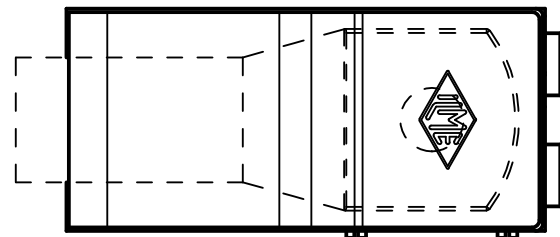

C

REV.	DATE	SIGNATURE



Dimensions in mm

Simplified representation with dimensions without tolerance

Original Size A4

Date 16/02/23

Sign. S.Diasparra

CX 01 30AM

Male line modular insert, screw, 90°-angled, 1 pole 300 A 1000 V 8 kV 3 - 1300 Vdc

Scale

1:1

