IDS M22 panel mount LED multi colour beacon


- $\cdot \phi$ 30 mm panel-mount LED multi-colour steady beacon
- RED or GREEN, can be switched externally
- Good signalling effect
- High degree of protection IP 65
- User-friendly connection technology


- Modern LED technology and electronics
- Other colour combinations available on request
- For industrial and general applications
- Panel size Ø 22.5 mm/M22
- Adapter available for M30.5 mm panel size



TECHNICAL DATA

Housing	Ø 30 mm, Polycarbonate black (RAL 9005) or grey (RAL				
	7035)				
Lens	Polycarbonate, ribbed inside clear				
Type of mounting	any				
Panel size	22×1,5 (M22) and 30.5 mm (with adapter), mounting				
	depth 47 mm				
Connection technology Screw/plug-in terminal 2,5 mm ²					
Leakage current	0,003 A (PLC-suitable)				
Beacon type	LED steady beacon - 2 colours, in each case 1 colour				
	visible across whole lens				
Light source	6 LEDs				
Strobe/flash frequency	1 Hz				
Number of colours	2				
Duty cycle	100 %				
Service life	Light source: 100.000 h				
Operating temperature	-25°C/+50°C				
Degree of protection	IP65 & UL Type 4/4×/13				
Weight	30 g				



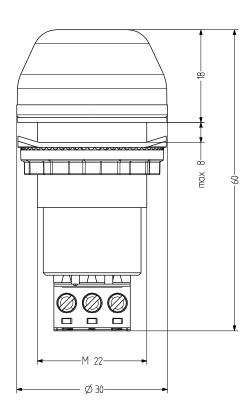

Mounting tool for 30 mm models

812 400 900

IDS

WZ30

ORDER DATA

Lens colour	ur	Nominal voltage	Voltage range (V)	Nominal current (A)	Housing colour	
					grey	black
clear		24 V AC/DC	+/- 10 %	0,028	800 226 405	800 626 405
0	8					
ADI	M30	WZ30				
ACCE	SSORIES					
Гуре	Type of accessory				Weight	Order numbe
ADM30	0 Adapter for M30.5 for 30.5 mm holes				8 g	812 500 900