



Capacitive Sensors Series 40 - NAMUR EN 60947-5-6 - StEx - ATEX

Housing M 12 x 1



- For use in areas with the risk of gas explosion, zone 0
- For use in areas with the risk of dust explosion, zone 20
- Housing material: PEEK
- Sensing distance 1...4 mm adjustable

DMT 03 ATEX E 048	IECEx BVS 07.0031
II 1G Ex ia IIC T1-T6 Ga	Ex ia IIC T1-T6 Ga
II 1D Ex ia IIIC T101°C Da	Ex ia IIIC T101°C Da



Technical data	Flush mountable
Operating distance S_n	2 mm
Operating distance min. / max. adjustable	1...4 mm
Electrical version	2-wire DC
Output function	NAMUR EN 60947-5-6
Type current	KAS-40-A12-N-M12-PEEK-Z02-1-HP-1G-1D
Type	KAS-40-A12-N-K-PEEK-StEx
Art. No.	KA 1440
Operating voltage (U_B)	5- 15 V DC, $U_i = 15$ V DC
Operating current active surface free	< typ. 1.5 mA
Operating current active surface covered	> typ. 2.5 mA
Self-inductance (L)	0.2 mH
Self-capacitance (C)	250 nF
Permitted residual ripple max.	5 %
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-20...+70 °C
LED-display	Yellow
Degree of protection IEC 60529	IP 67*
Connection cable	2 m, PVC, 2 x 0.14 mm ²
Housing material	PEEK (FDA 21 CFR 177.2415)
Active surface	PEEK (FDA 21 CFR 177.2415)
Lid	PC (FDA 21 CFR 177.1580)
Accessories (delivered with the sensor)	2 nuts M 12 x 1

All specifications are subject to change without notice. (06.01.2020)

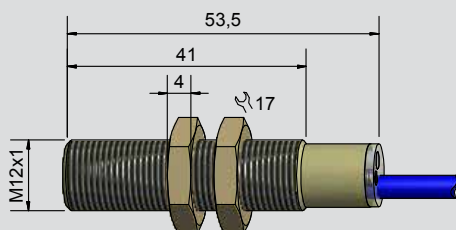

Matching Ex barriers can be offered on request.

* With sealed potentiometer screw

Made in Germany