



Y75

**TRUE LeV&L Capacitive Filling Level Probe - KFS**  
**With analogue measuring range**


- For connection to the capacitive amplifier KFA-1-...-Y70
- Housing material: PTFE, Ø 16 mm
- Automatic compensation of changes of the dielectric constant



**Technical data**

Active Zone [M]	370 mm
<b>Type for evaluation unit Y70</b>	<b>KFS-1-85-600-370-PTFE-D16-X02-Y75</b>
<b>Art.-No.</b>	<b>KF 0645</b>
Permitted ambient temperature (for active zone)	-70...+250 °C
Degree of protection IEC 60529 (probe)	IP 67
Norm	EN 60947-5-2
Connection cable to the evaluation unit KFA-1-...-Y70	2 m coax-cable with connectors
Housing material	PTFE (FDA 21 CFR 177.1550)
Housing material active zone	PTFE (FDA 21 CFR 177.1550)
<b>Accessories</b> for mounting (not delivered with the probe) please see our selection of accessories.	

All specifications are subject to change without notice. (28.03.2019)

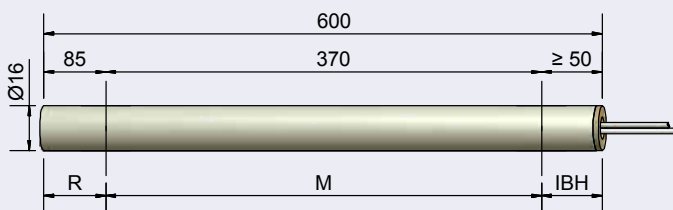

Technical data for connectors on request.

Please determine the total length "L" and the measuring range "M" when ordering.

Other housing materials for the active zone (probe), like PVDF or PE on request.

Made in Germany