
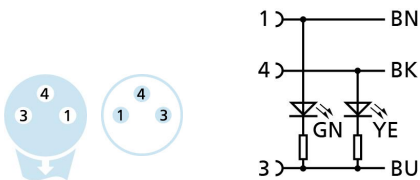


M8, female, angled, 3 poles, M8, male, straight, 3 poles, with LED, sensor-/actuator cable

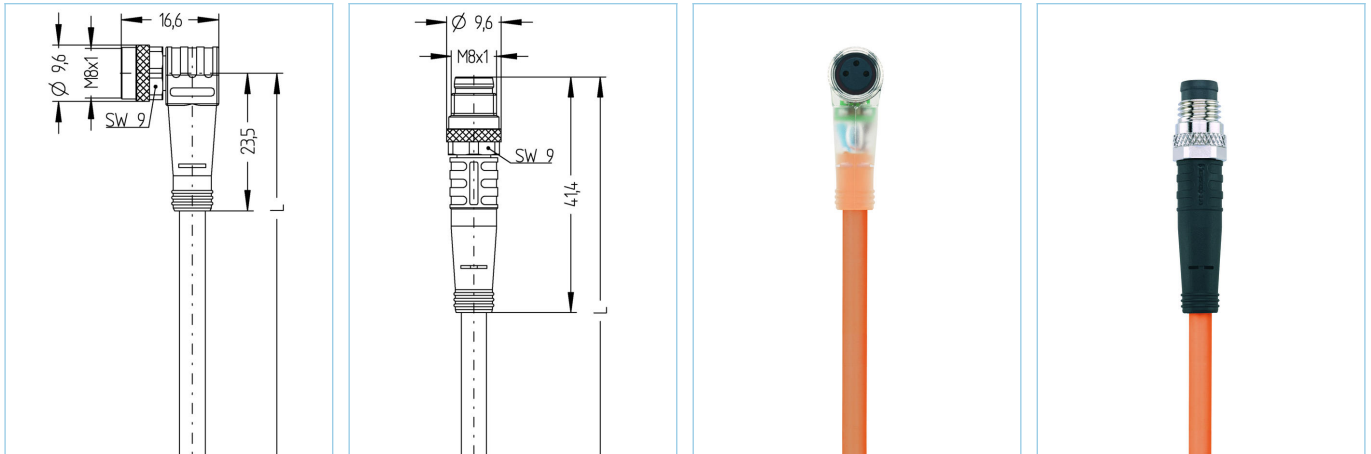

Product data

| | |
|--------------------|----------------------------|
| Item description | AL-SWKP3P2-2-AL-SSP3/S7400 |
| Item-No. | 8059205 |
| Length | 2m |
| Customs tariff-No. | 85444290 |
| Step-File | AL-SWKP3P2_AL-SSP3.stp |
| EAN | 4047106147754 |
| Label-carrier | 2 pieces |

| Technical data | A-side | B-side |
|--------------------------------|------------------------------|----------------------------|
| Connector | female, angled, M8, with LED | male, straight, M8 |
| Number of pins | 3 | 3 |
| Pin assignment | 1 BN, 3 BU, 4BK | 1 BN, 3 BU, 4BK |
| Rated voltage | 30V | 60V |
| Current load (at 40°C) | 4A | 4A |
| Insulation resistance | ≥10 ⁹ Ω | ≥10 ⁹ Ω |
| Resistance | ≤ 5mΩ | ≤ 5mΩ |
| Ambient temperature product | -30°C...+90°C | -30°C...+90°C |
| Contact material | Metal, CuZn, gold-plated | Metal, CuSn, gold-plated |
| Contact-carrier material | Plastic, TPU, BK | Plastic, TPU, BK |
| Grip body material | Plastic, TPU, transparent | Plastic, TPU, BK |
| Coupling nut material | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated |
| Sealing (female) material | FPM/FKM | |
| Circuit logic | pnp | |
| Signal status-indicator | LED YE | |
| Standards | IEC 61076-2-104 | IEC 61076-2-104 |
| Degree of protection (mounted) | IP65, IP67, IP68 | IP65, IP67, IP68 |
| Mechanical life-cycle | >100 mating cycles | >100 mating cycles |
| Degree of pollution | 3 | 3 |

| | |
|--------------|--------------------------------|
| Cable | PUR, UL, S7400, robotic |
|--------------|--------------------------------|

Flexible, silicone- and halogen free control cable with high mechanical strength. Due to its outstanding properties in drag-chain adaption, torsionresistance and weld-field immunity, it is very well suited for the flexible applications in robotics, handling- and assembly technology as well as machine tools. The cable meets the UL and CSA (UL10493/20549; cULus) requirements.

| | |
|--------------------------------|--|
| Outer diameter of jacket | 4.60 mm |
| Cable-jacket material | PUR |
| Jacket color | OG, similar RAL2003 |
| Wire cross-section | 3 x 0.25 mm ² |
| Wire insulation material | PP |
| Wire colors | BN, BU, BK |
| Wire structure | 32 x 0.10 mm |
| Bending radius (fixed) | 5 x Ø-cable |
| Bending radius (repeated) | 10 x Ø-cable |
| Temperature range (repeated) | -30°C...+90°C |
| Temperature range (fixed) | -40°C...+90°C |
| Temperature range (drag chain) | -25°C...+60°C |
| Drag chain-application | ≥ 10 Mio. cycles |
| Halogen-free | Yes |
| Torsion | +/-360°/m, ≥ 10 Mio. cycles |
| Rated voltage cable | ≤300 V |
| Special features | flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant |

| | |
|-----------------------|--|
| Classification | |
|-----------------------|--|

| | |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |

| |
|--------------------|
| Accessories |
|--------------------|

| |
|-------------------------|
| Mounting-set, M8 |
|-------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8047663>

| |
|--------------------------|
| Torque-wrench set |
|--------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431>

| |
|----------------------------|
| Marking rings Ø 9mm |
|----------------------------|

<https://www.escha.net/en/products/standard/accessories-for-connectivity/?p=1&o=3&n=15&f=809>

| |
|------------------------|
| Link to product |
|------------------------|

<https://www.escha.net/en/products/standard/sensoractuator-connectors/8059205>