



Ex foot switch


Ex GFM 2 - 3m

Material number: 1180291 (Material number old: 82106201)

Features/Options:

- Ex zone 1 and 21
- 2-pedal type
- Metal enclosure
- Low pedal height
- With pre-wired cable
- Attention: Please state required international approvals with your order!

Dimensions

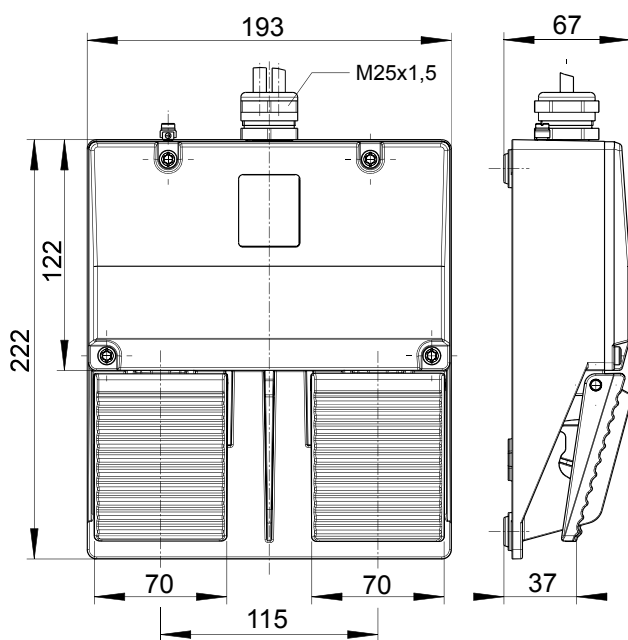

Technical data

Applied standards	EN 60947-5-1, EN 60079-0, EN 60079-1, EN 60079-31, EN ISO 13849-1
Enclosure	aluminium die-cast, powder-coated
Cover	aluminium die-cast, powder-coated
Pedal	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Degree of protection	IP 65 to IEC/EN 60529
B_{10d} (10 % load)	Ex GF 2: 2 million
T_M	Ex GF 2: max. 20 years
Connection	pre-wired cable H05VV-F
Cable cross-section	3 x 0.75 mm ² (incl. conductor ferrules)
Cable length	3 m
Contact material	silver
Switching system	snap action
Switching elements	1 change-over contact with single break, type C
Switch insert	1 x ExM 14 per pedal
Utilisation category	AC-15; DC-13
Rated operating current/voltage I_e/U_e	5 A/250 VAC; 0.16 A/230 VDC
Short-circuit protection	5 A gG/gN fuse
Ambient temperature	T6: -20 °C ... +60 °C, T5: -20 °C ... +75 °C
Mechanical life	> 1 million operations
Impact energy	max. 7 J



Errors and omissions excepted.



Ex foot switch
Ex GFM 2 - 3m

Material number: 1180291 (Material number old: 82106201)

Technical data


Ex marking  II 2G Ex d IIC T6/T5 Gb,
 II 2D Ex tb IIIC
T80 °C/T95 °C Db IP65

Approvals PTB 11 ATEX 1002 X

ERC

Weight 2400 g

Contact diagram



Switching diagram

