


Smart Access


CleanSwitch Basic


Touchless switch

Original instructions

General







- (1) Front cover
- (2) Screw
- (3) Mounting frame
- 4 Frame sealing
- (5) PCB module
- (6) Sensor housing
- (7) Housing cover

1 Safety instructions

The unit may only be installed and commissioned by trained and qualified personnel.


The unit may only be opened and repaired by the manufacturer.

This unit may only be operated from a protective low-voltage with safe electrical isolation.


Always consider the safety functions of your application as a whole, never just in relation to one individual component of the system.

The installer is responsible for carrying out a risk assessment and installing the detector and the system correctly. Avoid touching any electronic components.

2 Assembly

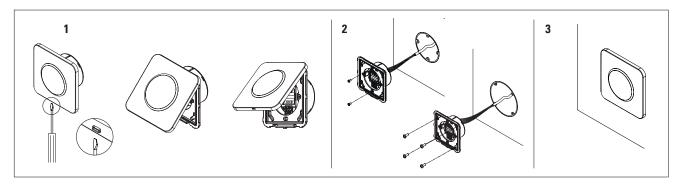

3 Configuration




DIP switches


- 4 ON Toggle Mode 4 OFF Pulse Mode
- ON Toggle Mode OFF

Pulse Mode

4 Electrical connections



Stripping length min. 8.5 mm (solid or flexible wire)



AWG 24 - 16 / 0.2 - 1.5 mm²

- Solid wire > push in
- Flexible wire > press button and push in

6 Technical data

Technology	Microwave Doppler Radar
Frequency	24.125 GHz
Detection range	0.1 – 0.5 m
Detection mode	Pulse mode: sensor detects while hand is moving Toggle mode: first movement on/ second movement off
Detection speed	Min: 5 Hz or ± 3 cm/s Max: 200 Hz or ± 1.2 m/s
Supply voltage	12 - 24 VAC ± 10 % (50 - 60 Hz) 12 - 24 VDC + 20 % / - 10 %
Max. Power consumption	< 1 W (without optical feedback)
Output	Relay with switch-over contact (free of potential) Max. switching voltage/current (DC): 1A up to 30V, 0.5A up to 60V Max. switching voltage/current (AC): 1A up to 60V, 0.5A up to 125V Max. switching power: 30 W (DC) / 60 VA (AC)
Output hold time	"Relay hold time": 0.3 s
Storage / operation temperature	− 20 to + 60 °C
Protection class	IP65 (fixed with 4 screws, smooth surface)
Dimension (mm)	88 x 88 x 38 mm (L x W x H)
Weight	55 g
Materials	ASA / PC

Note: CleanSwitch Basic is according VAH list resistant to surface disinfectants in hospitals.

7 Declaration of conformity, identification of the year of manufacture by means of the serial number

7.1 EC-Declaration of Conformity

Manufacturer: Bircher Reglomat AG, Wiesengasse 20, CH-8222 Beringen

Following directives have been observed: RoHS 2011/65/EU, RED 2014/53/EU

Product variant: CleanSwitch Basic

7.2 FFC approval

This device meets the requirements of Part 15 of the FCC regulations and the RSS-210 standard of Industry Canada.



Warning: Changes or modifications made to this equipment not expressly approved by Bircher Reglomat AG may void the FCC authorisation to operate this equipment.

7.3 Identification of the year of manufacture

Bircher Regionat AG 8222 Beringen, Switzerland www.bircher.com CleanSwitch Basic wt open1 Touchless switch (10D)1744 (T) 029899999201711010010001 Year Week 17 44

Contact

Manufacturer

BBC Bircher Smart Access

Bircher Reglomat AG Wiesengasse 20 CH-8222 Beringen www.bircher.com