



## ■-L&V&L Capacitive Filling Level Probe - KFI 2 Limit value switching points

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Connection head and process connection stainless steel VA no. 1.4305 / AISI 303
- Process connection G1"
- Automatic identification of NPN / PNP function
- Probe length max. 2000 mm
- With flange connector M 12 x 1 (5-pin Teach function included)



### Technical data

Active zones [M]	363 mm
Electrical version	4 - pin DC
Output function	2 limit value switching points, normally open
<b>Type</b>	<b>KFI-5-2-500-363-S-GFK/VA-TB80-G1"-Y10-ETW</b>
<b>Art.-No.</b>	<b>KI 0069</b>
Operating voltage (U <sub>B</sub> )	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
Permitted ambient temperature	-25...+200 °C (IB1, M, IB2)
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection	Flange connector M 12 x 1 (5-pin)
Housing material	VA No. 1.4305 / AISI 303
Active zone	GFK
Lid	PA / PPO

**Accessories:** Temperature buffer TP80 # 194020 for mounting (is not delivered with the probe)



For matching connectors please see our selection of accessories.

\*Where applicable


### EasyTeach chart:

LED green / Adjustment function

- Adjustment S1
- Adjustment S2
- Factory set
- Test



Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.

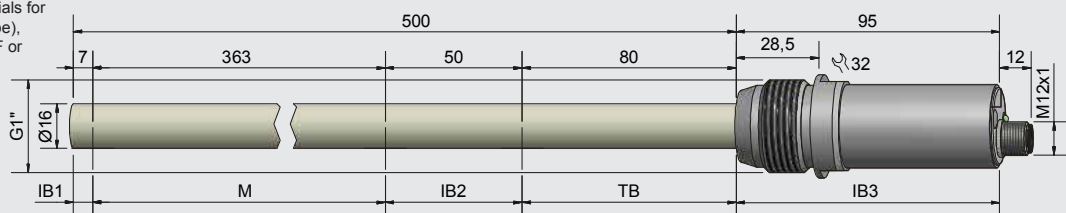

Made in Germany

All specifications are subject to change without notice. (11/2014)