
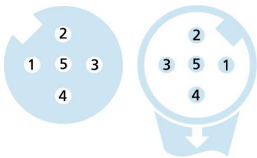


M12, female, straight, 5 poles, M12, male, angled, 5 poles, sensor-/actuator cable

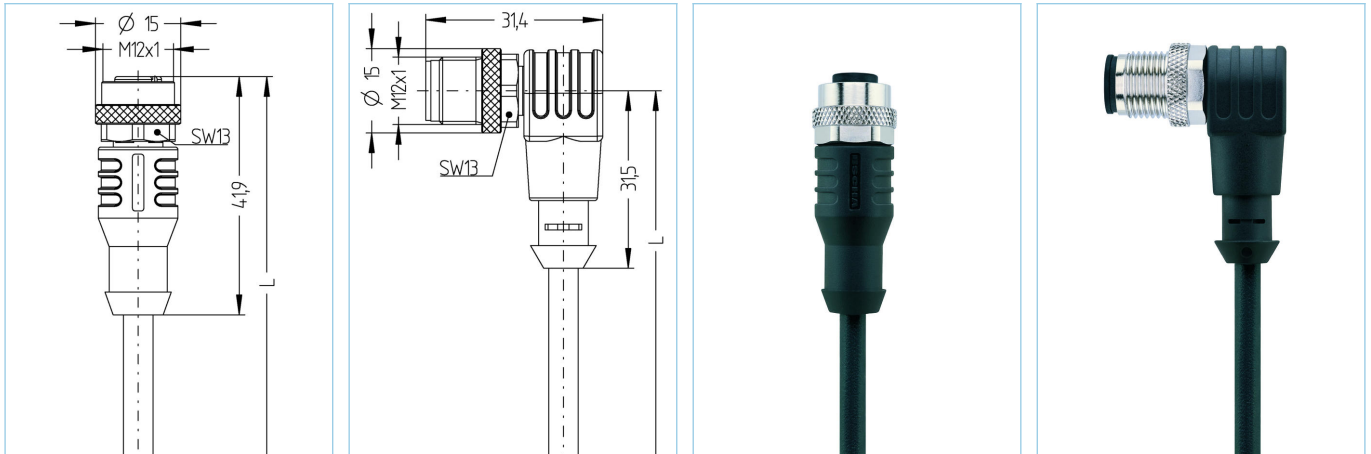

| Product data                   |                              |                              |
|--------------------------------|------------------------------|------------------------------|
| Item description               | AL-WAK4.5-2-AL-WWAS4.5/S370  |                              |
| Item-No.                       | 8044059                      |                              |
| Length                         | 2m                           |                              |
| Customs tariff-No.             | 85444290                     |                              |
| Step-File                      | AL-WAK4_5_AL-WWAS4_5.stp     |                              |
| EAN                            | 4047106003678                |                              |
| Label-carrier                  | 2 pieces                     |                              |
| Technical data                 | A-side                       | B-side                       |
| Connector                      | female, straight, M12        | male, angled, M12            |
| Number of pins                 | 5                            | 5                            |
| Pin assignment                 | 1 BN, 2 WH, 3 BU, 4 BK, 5 GY | 1 BN, 2 WH, 3 BU, 4 BK, 5 GY |
| Coding of                      | A                            | A                            |
| Rated voltage                  | 60V                          | 60V                          |
| Current load (at 40°C)         | 4A                           | 4A                           |
| Insulation resistance          | $\geq 10^9 \Omega$           | $\geq 10^9 \Omega$           |
| Resistance                     | $\leq 5 m\Omega$             | $\leq 5 m\Omega$             |
| Ambient temperature product    | -30°C...+90°C                | -30°C...+90°C                |
| Contact material               | Metal, CuSn, gold-plated     | Metal, CuSn, gold-plated     |
| Contact-carrier material       | Plastic, TPU, BK             | Plastic, TPU, BK             |
| Grip body material             | Plastic, TPU, BK             | Plastic, TPU, BK             |
| Coupling nut material          | Metal, CuZn, nickel-plated   | Metal, CuZn, nickel-plated   |
| Sealing (female) material      | FPM/FKM                      |                              |
| Standards                      | IEC 61076-2-101              | IEC 61076-2-101              |
| Degree of protection (mounted) | IP65, IP67, IP68             | IP65, IP67, IP68             |
| Mechanical life-cycle          | >100 mating cycles           | >100 mating cycles           |
| Degree of pollution            | 3                            | 3                            |

|              |                      |
|--------------|----------------------|
| <b>Cable</b> | <b>PUR, UL, S370</b> |
|--------------|----------------------|

Flexible, silicone- and halogen-free control line with high mechanical strength. The cable is chemicals, hydrolysis-, and microbes- resistant. The drag-chain application is possible at a bending radius of minimum 10 x d. Due to its weld-field immunity, the cable is very well suited for the flexible application in robotics, machine-tool, and metal-cutting production. The cables meet the UL and CSA (UL10493/20549; cULus) requirements.

|                                |  |
|--------------------------------|--|
| Outer diameter of jacket       | 5.20 mm  |
| Cable-jacket material          | PUR  |
| Jacket color                   | BK, similar RAL9005  |
| Wire cross-section             | 5 x 0.34 mm <sup>2</sup>   |
| Wire insulation material       | PP   |
| Wire colors                    | BN, WH, BU, BK, GY   |
| Wire structure                 | 42 x 0.10 mm   |
| Bending radius (fixed)         | 5 x Ø-cable  |
| Bending radius (repeated)      | 10 x Ø-cable   |
| Temperature range (repeated)   | -30°C...+90°C  |
| Temperature range (fixed)      | -40°C...+90°C  |
| Temperature range (drag chain) | -25°C...+60°C  |
| Drag chain-application         | 3 Mio. cycles  |
| Halogen-free                   | Yes  |
| Torsion                        | +/-180°/m, < 1 Mio. cycles   |
| Rated voltage cable            | ≤300 V   |
| Special features               | flame retardant, seawater resistant, recyclable, LABS free, RoHs compliant, acid- and alkali resistant, ozone resistant, UV resistant, hydrolysis proof, drag chain-adapted, torsion resistant, welding sparks resistant, halogen free, silicone free, oil resistant |

|                       |  |
|-----------------------|--|
| <b>Classification</b> |  |
|-----------------------|--|

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0   | EC001855 |
| ETIM 6.0   | EC001855 |

|                    |
|--------------------|
| <b>Accessories</b> |
|--------------------|

Mounting-set, M12  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/8047664>

Torque-wrench set  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431>

Marking rings Ø 9mm  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/?p=1&o=3&n=15&f=809>

|                        |
|------------------------|
| <b>Link to product</b> |
|------------------------|

<https://www.escha.net/en/products/standard/sensoractuator-connectors/8044059>